



**G. S. I. Inc.**

*Manufacturer & Distributor of Aerospace Lighting*

**Godfrey Systems International, Inc.**

3051 Pine Street

Clearwater, FL. 33763-0914 ■ U. S. A.

Tel: (727) 799-4916 ■ Fax: (727) 724-0212

E-Mail: [Tim.Godfrey@gsilight.com](mailto:Tim.Godfrey@gsilight.com), [gsiinc@knology.net](mailto:gsiinc@knology.net)

## LOW INTENSITY DOUBLE LED OBSTRUCTION LIGHT

### Compliance:

ICAO Annex XIV, Vol. I Par. 6.3.23  
FAA AC 150/5345-43F

### Applications:

The low intensity LED obstruction light is designed in accordance with the requirements of ICAO (Annex 14, Vol. I, par. 6.3.23) and is dedicated to the night signaling of obstacles.


The signal installs state-of-the-art red/orange LED high-flux technology to significantly save on power consumption and to drastically increase the lifetime, thus reducing the life cycle costs with respect to the standard incandescent lamps. The signal is NVG compatible without any additional external filter.

The signal operates at 230Vac (input voltage) as a steady light. The mechanical interface for mounting is a threaded 1" bottom hub.

The Double LED Obstruction Light version consists of two independent LED Obstruction Lights.



### Photometric Characteristics:

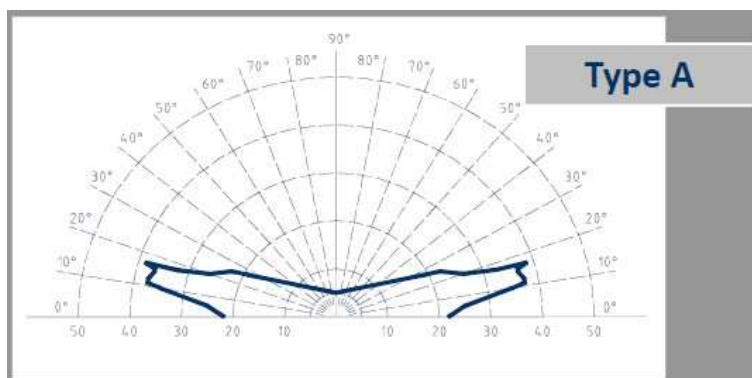

### Mechanical Interface:



## Technical Characteristics:

- Light alloy body, with inhibiting treatment.
- Thermal resistant white glass cap.
- Input Voltage: 230 V, 50/60Hz.
- State-of-the-art high-flux LED technology (100.000 hours life) – NVG compatible.
- Electrical Power: 12 W MAX.
- Watertight enclosure IP 65 (complying to EN 60529).
- Temperature Range: -55°C + 55°C.
- Earth grounding provisions provided.
- Delivery Package: 10 Kg., 200 x 200 x 500 mm.
- Mechanical Interface: Threaded 1” GAS bottom hub.

## Packaging Data:

<b>ORDERING INFORMATION</b>	
<b>DOLI – S S S – S- S</b>	
<b>Voltage</b>	230= 230 VAC
<b>Type</b>	A = ICAO Type A B = ICAO Type B
<b>Mechanical Interface</b>	S= Standard 1” GAS

**PACKAGING DATA**  
Box: 20x20x50 cm Weight: 10kg

**Sold & Serviced in the United States & Canada by G. S. I. Inc.**

**Website: [www.gsilight.com](http://www.gsilight.com)**

### Manufactured by:

L3 Calzoni

Via A. Gasperi 7 ■ 40012 Calderara di Reno (BO) ■ Italy

Tel: + 39 05 14 13 77 ■ Fax: + 39 05 14 13 75 55

E-mail: [calzoni.general@l-3com.com](mailto:calzoni.general@l-3com.com) ■ Website: [www.calzoni.com](http://www.calzoni.com)

